


**WEIGHT**  
 DRY 620 KG  
 WET 1455 KG

**MOTOR**  
 4.0 kW 6 POLE FOOT MTD  
 TEFC 415-3-50

**IMPELLER**  
 AXIAL 1150/4-4/30/PPG/6WR

**TERMINATION POINTS**  
 N1-HOT WATER INLET NB100 (FLANGE)-PVC  
 N2-QUICK FILL NB20 BSP (M)-BRASS  
 N3-MAKE UP WATER NB20 (M)-BRASS  
 N4-OVERFLOW NB32 (F)-PVC  
 N5-COLD WATER OUTLET NB150 (FLANGE)-PVC  
 N6-DRAIN NB50 (M) PVC

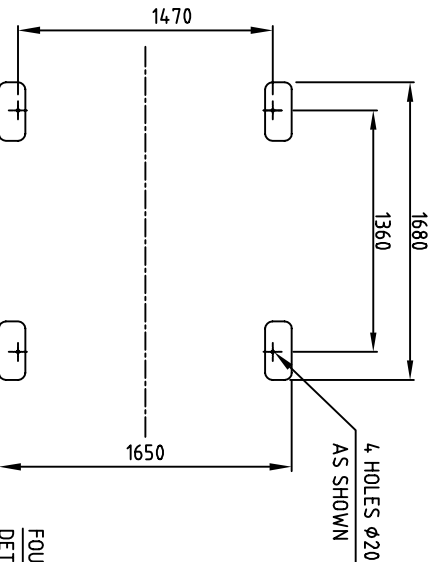

**FOUNDATION  
 DETAILS**

REF. DRWG. NO.	REFERENCE DRAWING TITLE

NO.	DESCRIPTION	REV. BY	DATE	APPR. BY

**GENERAL NOTES**

1. ALL WELDS TO BE 6X/3MM PLATE THICKNESS
2. CONTINUOUS FILLER TO BE USED THROUGHOUT WITH A558 PART 1
3. ALL STEEL SECTIONS TO BE IN ACCORDANCE WITH AS/NZS 3678
4. ALL DIMS AND WTS TO BE IN ACCORDANCE WITH ASTM/A516
5. DIMENSIONS IN MILLIMETERS

SURFACE FINISH	TOLERANCES	FINISH DIMENSIONS (R2000)
HAIRLINE	HALF DIMENSIONS	±0.2
ASME	FINISH DIMENSIONS	±0.1
ASME	FINISH DIMENSIONS	±0.1
ASME	FINISH DIMENSIONS	±0.1

DESIGNED BY	CHECKED BY	DATE	TITLE
			SC335 COOLING TOWER GENERAL ARRANGEMENT

THIS DRAWING IS THE SOLE PROPERTY OF SUPERCHELL AUSTRALIA. IT IS NOT TO BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF SUPERCHELL. IT MAY ONLY BE USED FOR MANUFACTURE WHEN ACCOMPANIED BY A WRITTEN ORDER.

A 11 10 9 8 7 6 5 4 3 2 1

H G F E D C B A