




SUPERCHILL - SULZER Cooling Tower EWK 680

Execution with Basin

EWK680 5.9.2000

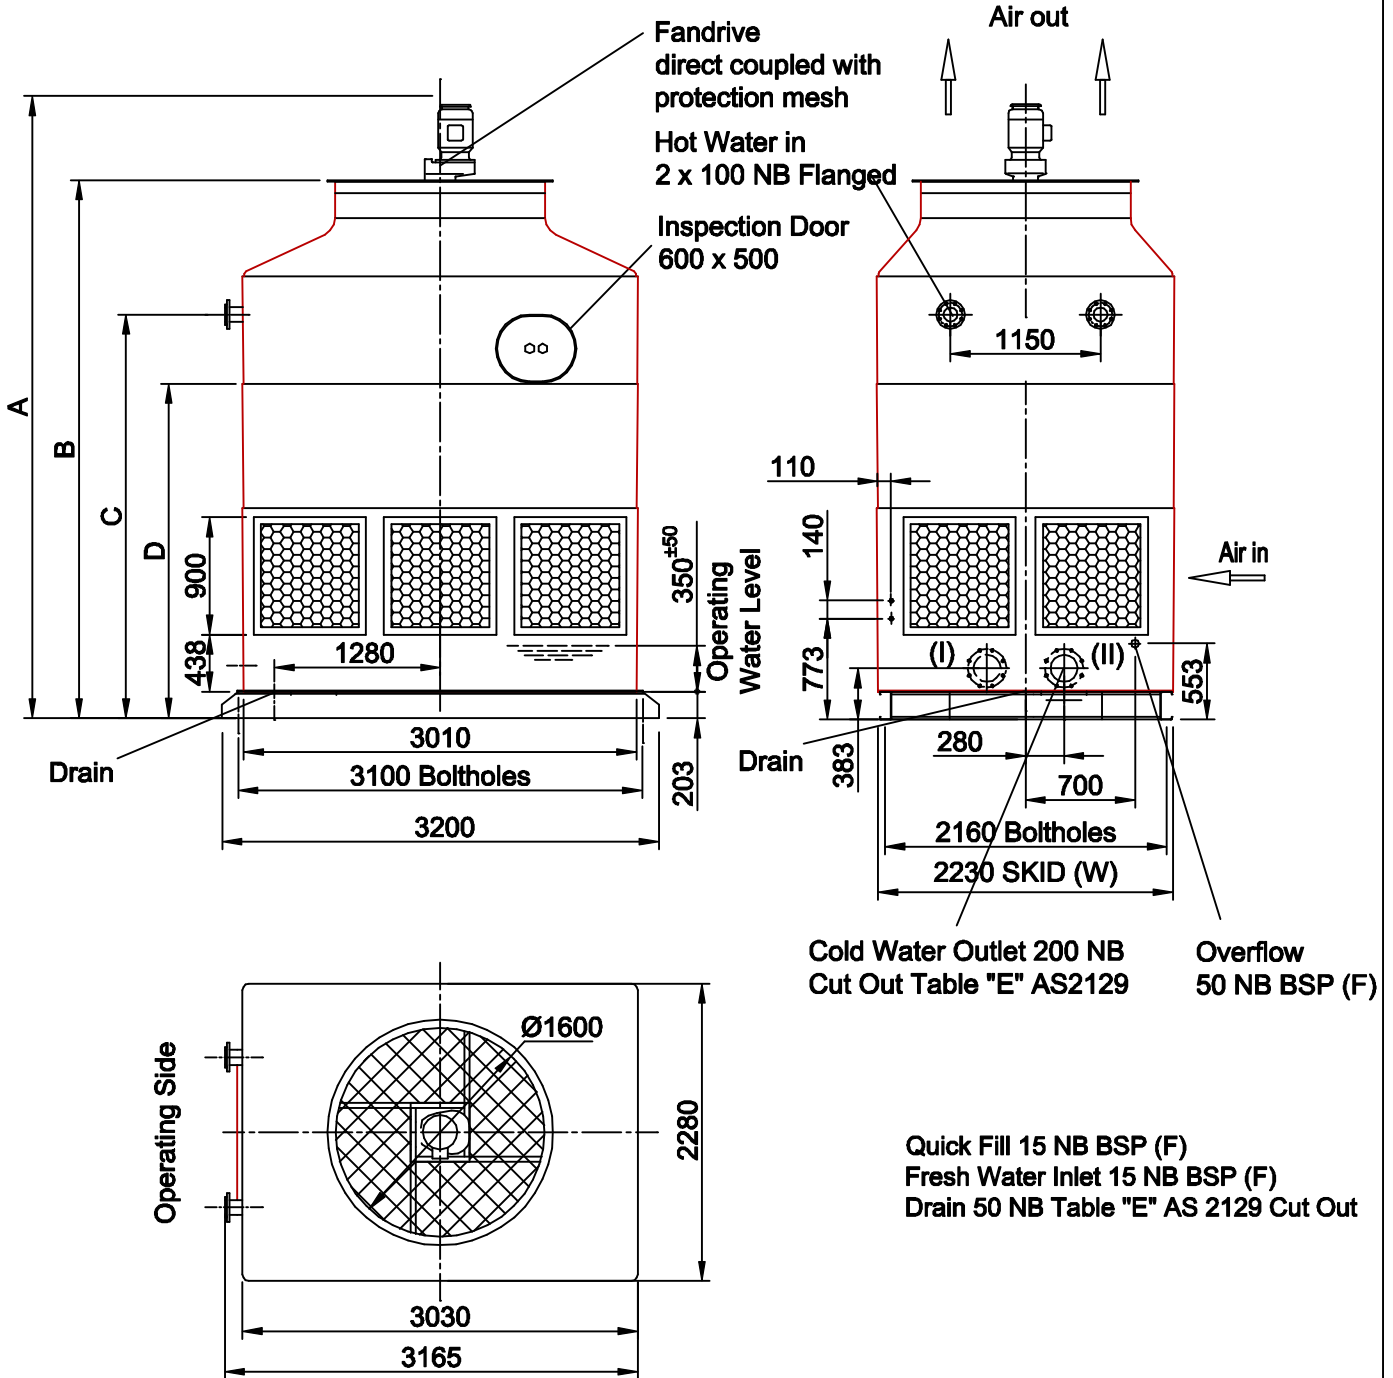

Cooling Tower Model	Dimensions in mm				Weight in kg		
	A	B	C	D	Empty	Operating	Emergency
EWK 680/06	4403	3823	2793	2263	1450	4400	5600
EWK 680/09	4703	4123	3093	2563	1550	4700	6000
EWK 680/12.19	5003	4423	3393	2863	1650	4900	6500
EWK 680/15.19	5363	4783	3753	2863	2050	5400	7200
Cold Water Outlet							
Water Flow m ³ /h	50-135 (I)		136-200 (I) + (II)				
Cold Water Outlet	1xDN200		2xDN200				
Optional Floor Outlet	1xDN250		1xDN250				

All flanged connections and cut outs as per AS. 2129 Table "E"
Tolerances of overall and connection dimensions ±10mm

SUPERCHILL AUSTRALIA PTY LTD
256 Princes HWY Dandenong 3175
Technical changes may occur without notification